

Technical Data Sheet HASA 714

December 2013

Page 1 of 3

Product Description

Hernon[®] **HASA 714** is a single component structural anaerobic adhesive formulated for bonding rigid assemblies. **HASA 714** cures when it is confined between mating surfaces. **Hernon**[®] **EF**[®] **Primer 56** accelerates the cure.

Product Benefits

- Single component, ready to use adhesive.
- Room temperature cure.
- 100% active material, no solvents.
- Easy clean-up. Wipe uncured adhesive from outer surfaces.

Typical Applications

- Bonding ferrite to plated metals in electric motors and loud speakers.
- Bonding rearview mirror mounting button to glass.
- Where fast setting of adhesives with high structural properties is required.

Typical Properties (Uncured)

Property	Value
Chemical Type	Modified Urethane
Appearance	Amber liquid
Specific gravity @ 25°C	1.05
Viscosity @ 25°C, cP	800-1,100
Flash point	See MSDS

Typical Properties (Cured)

Physical Properties

Property	Value
Coefficient of thermal expansion, ASTM D696 (K ⁻¹)	100 x 10 ⁻⁶
Coefficient of thermal conductivity, ASTM C 177, W/(m·K)	0.1
Specific Heat, kJ/(kg·k)	0.3
Tensile strength, psi, ASTM D412	3,000
Elongation, %, ASTM D412	135
Modulus, psi, ASTM D638	44,000
Maximum Gap Fill, in.	0.003
Temperature Range, °F	-65 to 400


Electrical Properties

Property	Value
Dielectric Strength, kV/mm ASTM D149	30
Dielectric Constant @ ASTM D150	100 Hz 5.6 1 kHz 5.3 1 MHz 4.6
Dissipation Factor @ ASTM D150	0.10 kHz 0.03 1 kHz 0.03 10 kHz 0.04
Volume Resistivity, Ω·cm ASTM D257	2 × 10 ¹³
Surface Resistivity, Ω ASTM D257	2 × 10 ¹⁷

Typical Curing Performance

Cure Speed vs. Substrate

The rate of cure will depend on the substrate used. The graph below shows the shear strength developed with time on grit blasted steel lap shears and tested according to ISO 4587. (**EF**[®] **Primer 56** applied to one surface)

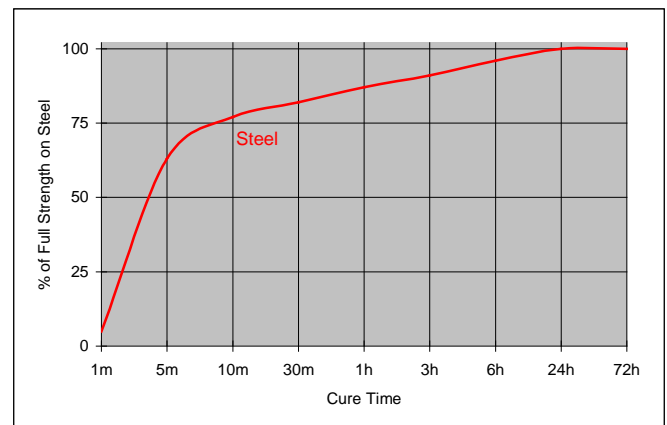

Typical Cured Performance

Shear Strength, Grit blasted steel specimens
ISO 4587, Two side activation with **EF**[®] **Primer 56**


Cure	N/mm ² (psi)
2 minutes at 22°C	≥ 10.0 (≥ 1450)
1 hour at 22°C	≥ 13.8 (≥ 2000)
24 hours at 22°C	≥ 17.2 (≥ 2500)

Typical Environmental Resistance

Cured for 1 week @ 22 °C, **EF® Primer 56** on 1 side
Shear Strength, ISO 4587
Steel (grit blasted)


Hot Strength

Tested at temperature

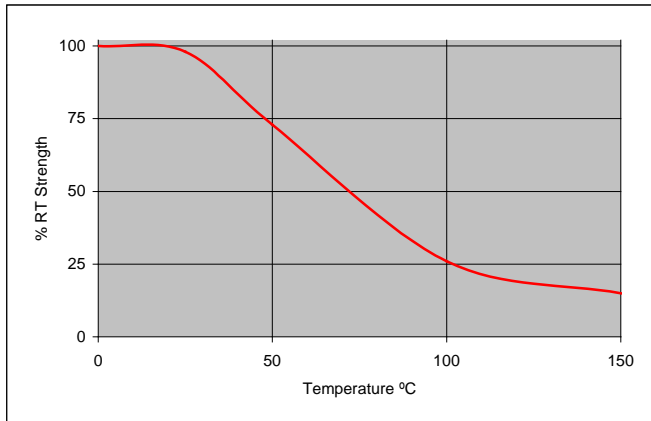

Heat Aging

Aged at temperature indicated - Tested at 72°F (22°C).

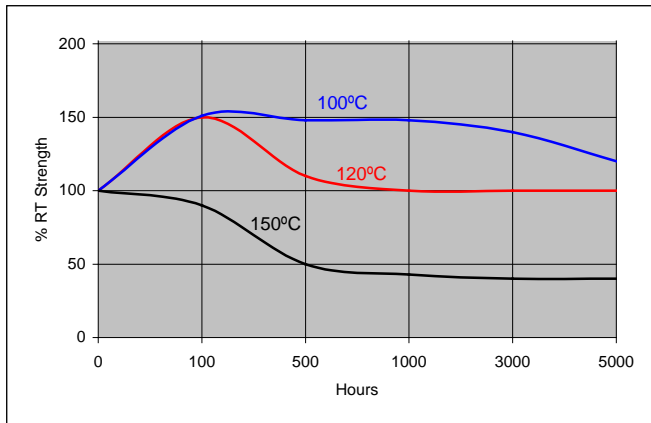

Chemical/Solvent Resistance

Aged under condition indicated - Tested at 72°F (22°C).

Chemical/Solvent	Temp (°C)	% of Initial Strength After 720 hours
Acetone	22	15
Trichloroethylene	22	40
Aircraft fuel (JP-4)	93	60
Water	93	60
Water Glycol 50/50	93	10
Humidity, 100% RH	82	60

General Information

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet (MSDS).

Where aqueous washing systems are used to clean the surfaces before bonding, it is important to check for compatibility of the washing solution with the adhesive. In some cases these aqueous washes can affect the cure and performance of the adhesive.

This product is not normally recommended for use on plastics (particularly thermoplastic materials where stress cracking of the plastic could result). It is recommended to confirm compatibility of the product with such substrates.

Directions for Use

- For best performance, bond surfaces should be clean and free of grease.
- To ensure a fast and reliable cure, **EF® Primer 56** should be applied to one of the bond surfaces and the adhesive to the other surface. Parts should be assembled within 15 minutes.
- The recommended bondline gap is 0.1 mm. Where bond gaps are large, (up to a maximum of 0.5mm), or faster cure speed is required, activator should be applied to both surfaces. Parts should be assembled immediately, (within 1 minute).
- Excess adhesive can be wiped away with organic solvent.
- Bond should be held clamped until adhesive has fixture.
- Product should be allowed to develop full strength before subjecting to any service loads, (typically 24 to 72 hours after assembly depending on bond gap and materials).

Storage

HASA 714 should be stored in a cool, dry location in unopened containers at a temperature between 46°F to 82°F (8°C to 28°C) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused material, do not return any material to its original container.

Dispensing Equipment

Hernon® offers a complete line of semi and fully automated dispensing equipment. Contact **Hernon® Sales** for additional information.

These suggestions and data are based on information we believe to be reliable and accurate, but no guarantee of their accuracy is made. HERNON MANUFACTURING®, INC. shall not be liable for any damage, loss or injury, direct or consequential arising out of the use or the inability to use the product. In every case, we urge and recommend that purchasers, before using any product in full scale production, make their own tests to determine whether the product is of satisfactory quality and suitability for their operations, and the user assumes all risk and liability whatsoever, in connection therewith. Hernon's Quality Management System for the design and manufacture of high performance adhesives and sealants is registered to the ISO 9001:2008 Quality Standard.