

## Technical Data Sheet Quantum<sup>®</sup> 132

December 2012

Page 1 of 3

### Product Description

**Hernon<sup>®</sup> Quantum<sup>®</sup> 132** is a state-of-the-art odorless and non-frosting single component, solventless, room temperature curing cyanoacrylate adhesive that polymerizes rapidly when pressed into a thin film between parts. The presence of surface moisture commences the cure of the adhesive. **Quantum<sup>®</sup> 132** develops handling strength within seconds and full functional strength in a few hours. **Quantum<sup>®</sup> 132** can bond a wide variety of surfaces including: metals, thermoplastics, elastomers, ceramics, leather, cork, and paper. Notwithstanding the superior bonding capability of **Quantum<sup>®</sup> 132**, it is NOT recommended for long-term glass to glass bonding applications.

### Typical Applications

#### **Bonding**

Rubber bumpers  
Permanent locking of plastic  
Fasteners  
Speaker components  
Shock mounts  
Gears to shaft  
Wiper blades  
Acrylic windows  
Name plates  
Catheters  
Honing stones  
Security collars  
O-rings  
Insulation pads

#### **Fixturing**

Filter caps  
Jumper wires  
Heat sinks  
Gaskets  
Golf club parts  
Tennis racquet parts  
P.C. boards  
Wire tacking

#### **Potting**

Transistors  
Tamper proofing  
Adjustable components  
Fiberglass molds

### Product Benefits

- Odorless, non-frosting cyanoacrylate.
- Rapid Cure - forms a strong bond at room temperature in less than a minute with contact pressure.
- Surfaces - will bond almost any combination of similar or dissimilar materials.
- Easy Use - single component feature, eliminates any mixing.

### Typical Properties (Uncured)

Property	Value
Chemical Type	Modified Cyanoacrylate Ester
Appearance	Colorless - pale yellow liquid
Viscosity @ 77°F (25°C), cP	850-1800
Specific gravity	1.1
Flash point	See MSDS

### Typical Properties (Cured)

Cured 24 Hours @ 22°C

#### **Physical Properties**

Property	Value
Gap Fill, mm (in.)	0.203 (0.008)

#### **Electrical Properties**

Property	Value
Dielectric Strength, kV/mm ASTM D149	25
Dielectric Constant @ ASTM D150	0.10 kHz 1 kHz 10 kHz
	2 to 3.3 2 to 3.5 2 to 3.5
Dissipation Factor @ ASTM D150	0.10 kHz 1 kHz 10 kHz
	< 0.02 < 0.02 < 0.02

### Typical Curing Performance

#### **Cure Speed vs. Substrate**

The rate of cure will depend on the substrate used. The table below shows the fixture time achieved on different materials at 22°C / 50% relative humidity. Fixture time is defined as the time to develop a shear strength of 0.1 N/mm<sup>2</sup>.


Substrate	Fixture Time (seconds)
Steel	30 to 60
Aluminum	5 to 20
Zinc Dichromate	60 to 180
Neoprene	< 5
Nitrile Rubber	< 5
ABS	20 to 60
PVC	20 to 60
Polycarbonate	20 to 60
Phenolic	5 to 20

#### **Cure Speed vs. Bond Gap**

The rate of cure will depend on the bondline gap. Thin bond lines result in high cure speeds, increasing the bond gap will decrease the rate of cure.


#### **Cure Speed vs. Humidity**

The rate of cure will depend on the ambient relative humidity. The following graph shows the tensile strength developed with time on Buna N rubber at different levels of humidity.

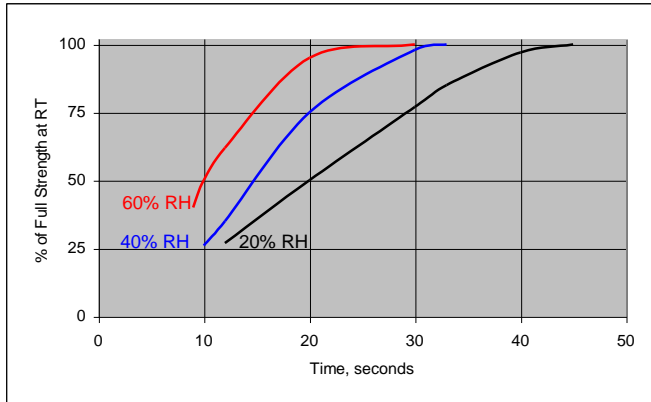

**Hot Strength**

Tested at temperature

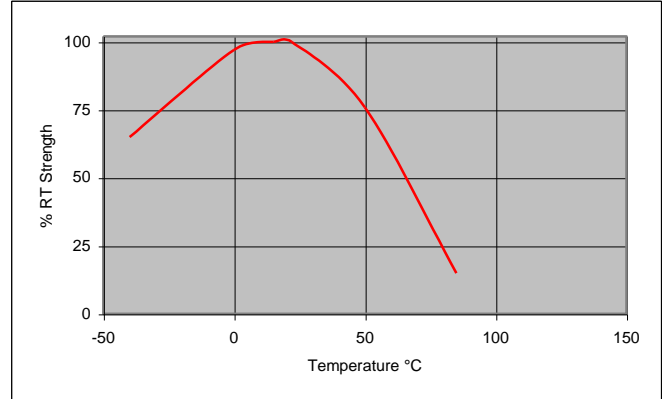


**Cure Speed vs. Accelerator**

Where cure speed is unacceptably long due to large gaps, applying accelerator to the surface will improve cure speed. However, this can reduce ultimate strength of the bond and therefore testing is recommended to confirm effect.

**Heat Aging**

Aged at temperature indicated and tested at 22°C

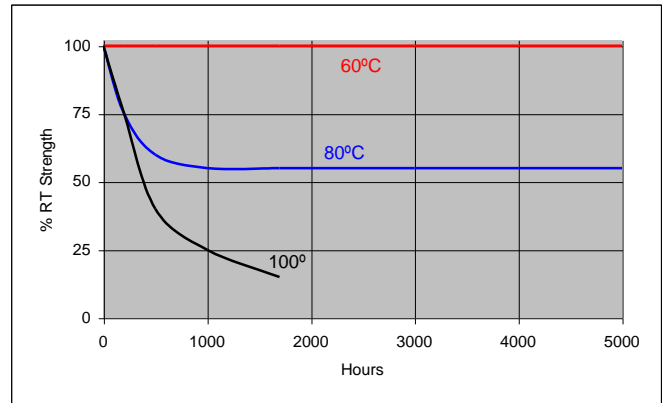

**Typical Cured Performance**

**Shear Strength**

Cured 24 Hours @ 22°C - tested according to ISO 4587

Substrate	Shear Strength N/mm <sup>2</sup> (psi)
Steel	13.8 to 22.1 (2000 to 3200)
Aluminum	9.0 to 15.2 (1300 to 2200)
Zinc Dichromate	4.1 to 10.3 (600 to 1500)
ABS	6.2 to 20.0 (900 to 2900)
PVC	2.1 to 8.3 (300 to 1200)
Polycarbonate	3.4 to 10.3 (500 to 1500)
Phenolic	4.8 to 15.2 (700 to 2200)
Neoprene	4.8 to 15.2 (700 to 2200)
Nitrile	4.8 to 15.2 (700 to 2200)

**Chemical/Solvent Resistance**

Aged under condition indicated - Tested at 72°F (22°C).

Chemical/Solvent	Temp (°C)	% of Initial Strength		
		100h	500h	1000h
Motor Oil	40	75	75	65
Gasoline	22	100	90	75
Ethanol	22	100	95	95
Isopropanol	22	90	90	90
Freon TA	22	100	100	100

**Tensile Strength**

Tested according to ISO 6922

Substrate	Cure Time @ 22°C	Tensile Strength N/mm <sup>2</sup> (psi)
Buna-N	10 seconds	≥ 4.5 (≥ 650)
	24 hours	4.8 to 15.2 (700 to 2200)

**Typical Environmental Resistance**

Cured for 1 week @ 22°C  
Shear Strength, ISO 4587  
Steel lap-shear specimens

**General Information**

**This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.**

**For safe handling information on this product, consult the Material Safety Data Sheet (MSDS).**

**Directions For Use**

For best performance bond surfaces should be clean and free from grease. This product performs best in thin bond gaps (0.05 mm).

**Disassembly and Cleanup**

Liquid Cyanoacrylate should not be wiped with rags or tissue. The fabric will cause polymerization and large quantities of adhesive will heat or cure causing smoke and strong irritating vapors. Always flood with excess water to clean up spill conditions.

**Storage**

Cyanoacrylate adhesives must be stored under refrigeration at a temperature of 40°F ± 5°F for extended shelf life. Before opening, the containers must be warmed to room temperature, otherwise, water may condense into the bottle and cause hardening of the adhesive. To prevent contamination of unused adhesive, do not return product to its original container.

**Dispensing Equipment**

**Hernon®** offers a complete line of semi and fully automated dispensing equipment. Contact **Hernon® Sales** for additional information.

These suggestions and data are based on information we believe to be reliable and accurate, but no guarantee of their accuracy is made. HERNON MANUFACTURING®, INC. shall not be liable for any damage, loss or injury, direct or consequential arising out of the use or the inability to use the product. In every case, we urge and recommend that purchasers, before using any product in full scale production, make their own tests to determine whether the product is of satisfactory quality and suitability for their operations, and the user assumes all risk and liability whatsoever, in connection therewith. Hernon's Quality Management System for the design and manufacture of high performance adhesives and sealants is registered to the ISO 9001:2008 Quality Standard.